



### Feature:


- ◆ Duralumin panel and steel chassis
- ◆ 12.1" TFT LCD display with Touch-screen
- ◆ Utilize Mini-ITX industry mainboard
- ◆ One VGA, LCD and VGA support independently dual-displaying
- ◆ One COM 、one LPT、one LAN、two USB ports

### Description:

PPC-3112 12.1" TFT LCD panel PC, with high strength duralumin panel and steel chassis, fanless design, support touch screen. It can be apply in various poor industry environments. Complete machine works with embedded low power-consumed Mini-ITX mainboard NORCO-6682. Rich exterior I/O ports provided: one 10/100Mbps Ethernet ports, one serial ports, two USB2.0 ports, it can be widely used in fields of Industry controlling, Building Stakeout, Net Conference, Medical Appliance, Bank, Booking Office, etc.

### Specification:

Main	Chassis Material	Duralumin Panel and steel chassis
	Display	Colorful TFT LCD 12.1" with Touch-screen
	Hard Disk Driver	One mini IDE
	Serial port	One Serial port
	Parallel port	One Parallel port
	Lan port	One RJ-45, 10/100Mbps LAN
	VGA	One VGA port
	USB	2个USB2.0接口
	KB/MS	PS/2 port
	Expansion slot	One CF card socket
	Cooling System	Fanless design
	Certification	3C、CE、FCC
Mainboard	Model Number	NORCO-6682ALE
	CPU	Onboard AMD LX700 CPU+CS5536
	Dimenison	170mm×170mm
Other	Power Supply	DC12V power input
	Operate System	Windows98/2000/XP, Unix 5.0.5, RedHat 9.0, FreeBSD etc.
	Dimension	320mm×77.5mm×250mm (W×D×H)
	Working Temperature	0℃～50℃
	Storage Temperature	-40℃～60℃
	Humidity	5%～9%, 40℃ (no condensing)

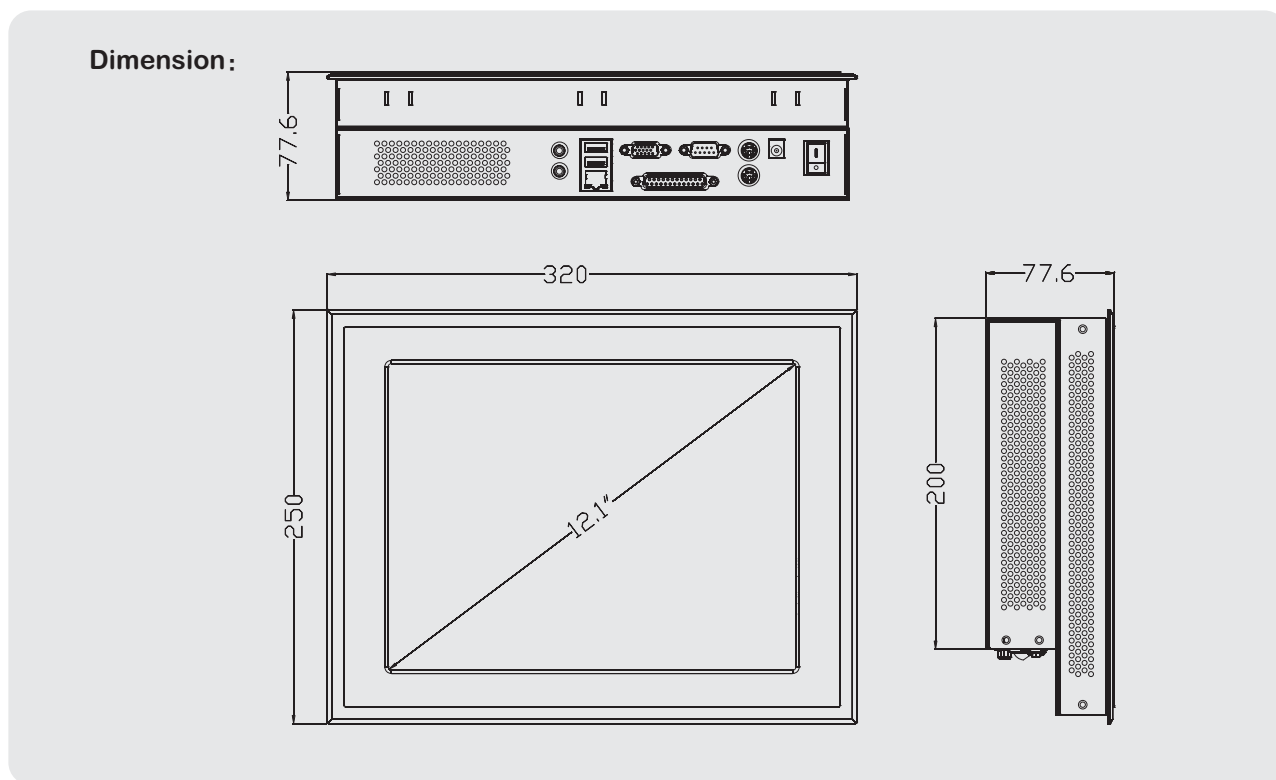

### Order Information:

Model No.	8.4"LCD	Touch Screen	Hard Disk Drive	RAM
PPC-3112	✓	✓	40G	DDR 512MB

### Accessories:

PSU cable	Product Manual	HDD screw	Screw	Screw
One	One	6 (1/8×6 screw)	4 (M4×8)	6 (M3×6)