


PPC-3284 is one rackmount model panel PC, with 8.4" TFT LCD display and fanless design .It could support industry grade defence.Which support one serial port, two 10/100Mbps Lan port, two USB2.0 ports, two Audio ports and PS/2 port, one VGA port.

PPC-3184 is a competitive model on price and performance. It can be widely used in fields of Telecom, Electric Power, Multimedia, Robolization. National Defence, Manufacture. Etc.

Specification: _

| | Chassis Meterial | Duralumin Panel and Steel Chassis |
|-----------|---------------------|---|
| | Display | TFT LCD 8.4" Display with touch screen |
| | Hard Disk Driver | One mini IDE port |
| | Serial port | One Serial port |
| | Parallel port | |
| | Lan port | Two RJ-45, 10/100Mbps Lan port |
| Main | VGA | One VGA port |
| | USB | Two USB2.0 port |
| | KB/MS | One PS/2 port |
| | Expansion slot | One Compact Flash Card Slot |
| | Cooling System | Two 40×40×10mm system cooling fan |
| | Certification | Pass 3C、CE、FCC |
| | Model Number | NORCO-3680ALE embedded motherboard |
| Mainboard | CPU | Onboard AMD LX700 CPU+CS5536 Chipset |
| | Dimenison | 145mm×102mm |
| | Power Supply | DC12V power supply |
| | Operate System | Windows98/2000/XP, Unix 5.0.5, RedHat 9.0, FreeBSD等 |
| Other | Dimension | 245mm×178mm×68mm (W×D×H) |
| Other | Working Temperature | 0℃~50℃ |
| | Storage Temperature | -40 ℃~60℃ |
| | Humidity | 5%∼9%, 40°C (no condensing) |
| | | |

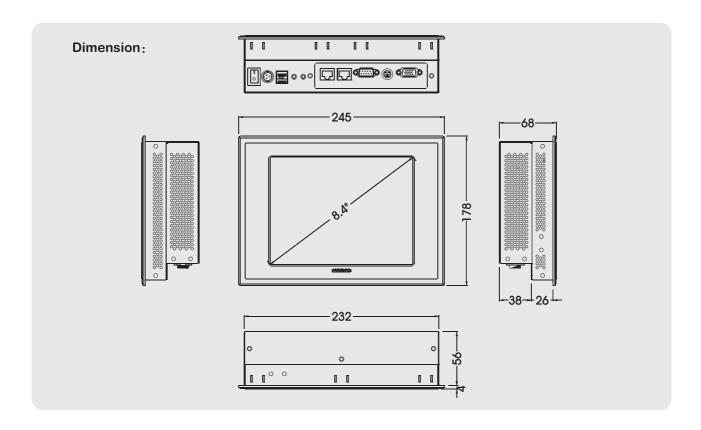





Order Information:

| Model No. | 8.4"LCD | Touch Screen | Hard Disk Drive | RAM |
|-----------|--------------|--------------|-----------------|-----------|
| PPC-3284 | \checkmark | √ | 40G | DDR 512MB |

Accessories:

| PSU cable | Product Manual | HDD screw | Screw | Screw |
|-----------|----------------|-----------------|----------|----------|
| One | One | 6 (1/8×6 screw) | 4 (M4×8) | 6 (M3×6) |