


# GOT-3126TL-830

12.1" SVGA TFT Extended Temp. Fanless Touch Panel Computer  
with Intel® Atom™ Processor (-20° ~ +55° C)

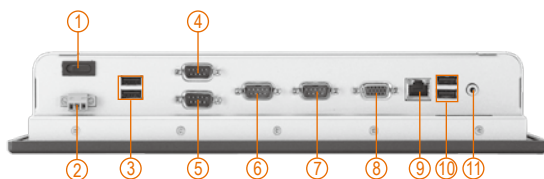

- |                   |                           |                      |
|-------------------|---------------------------|----------------------|
| 1. Power switch   | 6. COM 1 (RS-232/422/485) | 11. Audio (Line-out) |
| 2. DC power input | 7. COM 2 (RS-232)         |                      |
| 3. USB 2.0 x 2    | 8. VGA                    |                      |
| 4. COM 4 (RS-232) | 9. Ethernet               |                      |
| 5. COM 3 (RS-232) | 10. USB 2.0 x 2           |                      |

## Features



- 12" SVGA (800 x 600) color TFT LCD display
- Fanless cooling system with Intel® Atom™ N270 1.6 GHz
- Supports wide temperature range of -20° ~ +55° C
- Anti-vibration up to 1.3G (HDD, random)
- Supports WLAN antenna (optional)
- Easy for expansion: Mini Card
- Over-current protection-fuse
- Supports panel mount, wall mount, VESA arm, desktop stand (optional)



Side view

## Introduction

GOT-3126TL is the 12.1" fanless touch panel computer. By supporting a wide temperature range from -20° to +55° C, the GOT-3126TL is especially designed for harsh environments. The GOT-3126TL adopts a modern, super sleek fanless design, is equipped with a 12.1" TFT LCD, and low power consumption Intel® Atom™ processor. In response to customer's requests for wireless applications, the GOT-3126TL has a Mini Card slot and an optional fixed rotational WLAN antenna for wireless network connection. By just plugging in the Mini Card WLAN card, customers have instant access wireless LAN. The GOT-3126TL is suitable for many applications including transportation, train, control platforms on ships, oil pipe monitoring systems, and environmental monitoring of steelworks.

### Wide-temperature (-20° ~ +55° C) supported

The GOT-3126TL adopts unique extended temperature technology, with a temperature range from -20° to +55° C, with a fanless cooling system and compact design for harsh environments.

### Super slim design: 69mm

The GOT-3126TL is a super slim fanless touch panel computer for limited space environments. This fanless touch panel computer is designed around the concept of curved lines and soft edges by incorporating an ULV Intel® Atom™ processor and a streamlined mechanical layout.

### WLAN antenna supported (optional)

The GOT-3126TL provides a Mini Card slot and an optional fixed rotational WLAN antenna for wireless network connections. By simply plugging in the wireless LAN card, customers can use the unit in a wireless environment.

### Anti-vibration up to 1.3G

With a special vibration-resistant design patent, GOT-3126TL can work well under 1.3G (5-500Hz) in operation mode, and equipped with a 2.5" HDD.


## Specifications

|             |  |  |  |                                      |                   |
|-------------|--|--|--|--------------------------------------|-------------------|
| Front Bezel | IP65, NEMA 4 rugged protection, aluminum front bezel | System Memory                          | 1 x 200-pin DDR2 533 SO-DIMM max. up to 2 GB |                                      |                   |
| LCD Panel   | Display Type   | 12.1" SVGA TFT LCD                     | BIOS   | AMI 8 Mbit with RPL/PXE LAN boot ROM |                   |
|             | Brightness (cd/m <sup>2</sup> )                      | 450 nits                               |  | Storage                              | 1 x 2.5" SATA HDD |
|             | Resolution   | 800 x 600                              |  |                                      | 1 x CompactFlash™ |
|             | View Angle (H/V)                                     | 160° / 140°                            |  |                                      |                   |
| Main System | CPU  | Intel® Atom™ processor N270<br>1.6 GHz | Watchdog Timer                               | 255 levels, 0-255 sec.               |                   |
|             | Chipset  | Intel® 945GSE-ICH7M                    | Onboard Graphics                             | Integrated Intel® 945GSE             |                   |

|                     |  |
|---------------------|--|
| I/O Connector       | 3 x RS-232<br>1 x RS-232/422/485<br>1 x VGA<br>1 x Audio (Line-out)<br>4 x USB 2.0<br>1 x 10/100/1000Mbps Ethernet   |
| Expansion Interface | 1 x PCIe Mini Card   |
| Touchscreen         | Resistive type   |
| Power Supply        | 12/24V <sub>dc</sub> , 36W, w/ fuse power protection   |
| Dimensions          | 332 mm(13") (W) x 70.5 mm (2.77") (D)<br>x 267 mm (10.5") (H)  |
| Packing Dimensions  | 510 mm (20.08") (W) x 190 mm (7.48") (D) x 540 mm (21.26") (H)   |
| Weight (net/gross)  | 4.6 kg (10.14 lb)/6.4 kg (14.1 lb)   |
| Environment         | Operating temperature:<br>-20°C ~ +55°C (-4°F ~ 131°F)<br>(with W.T. DRAM/HDD/CF)<br>Relative humidity:<br>10% ~ 95% @ 40°C; non-condensing<br>Operation vibration:<br>1.3G, 5 ~ 500Hz, random for 2.5" HDD<br>2G, 5 ~ 500Hz, random for CompactFlash™ |
| Certification       | CE   |

\* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

## Dimensions

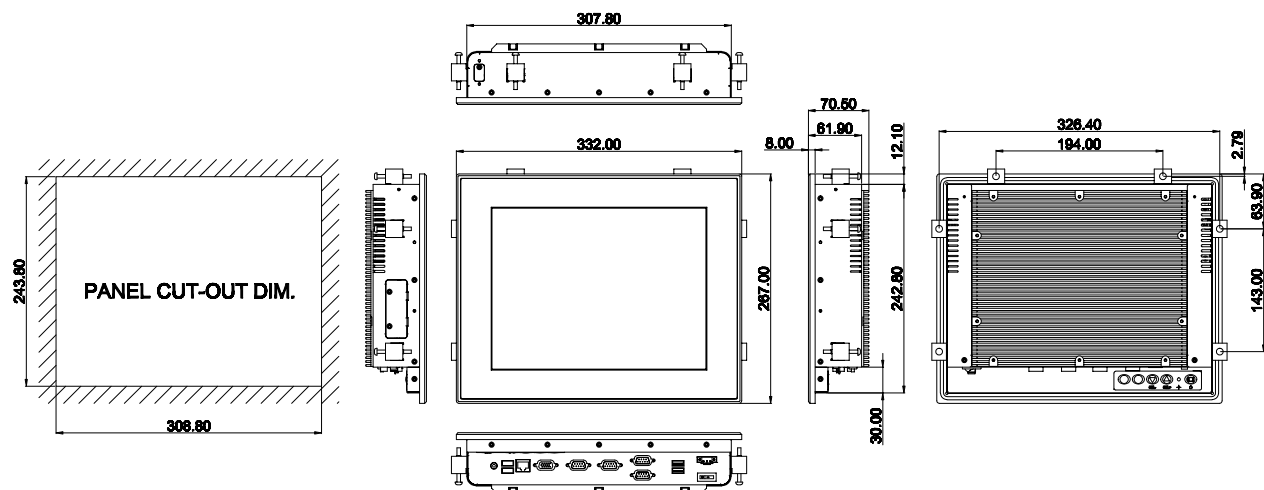

## Ordering Information

|                |  |
|----------------|--|
| GOT-3126TL-830 | 12.1" SVGA TFT fanless touch panel computer with Intel® Atom™ N270 (-20°C ~ +55°C) |
| Wall/VESA kit  | Wall/VESA mount kit for GOT-3126TL   |
| Desktop stand  | Desktop stand kit for GOT-3126TL   |
| Wireless       | 802.11 b/g wireless LAN kit  |
| 50966A23040E   | Power adapter, 70W, 110-230V <sub>AC</sub> to 24V <sub>DC</sub>                    |

\* Specification and certifications are based on options and may vary.

## Optional EOS Installation

Windows® XP Embedded  
Windows® CE.NET

## Optional OS Installation

Windows® XP

Overview

Industrial Panel Computers & Monitors

Heavy-duty Fanless Touch Panel Computers

Digital Signage Solutions

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories