


GOT-5120T-830

12.1" XGA/SVGA TFT Fanless Touch Panel Computer with Intel® Atom™ Processor N270

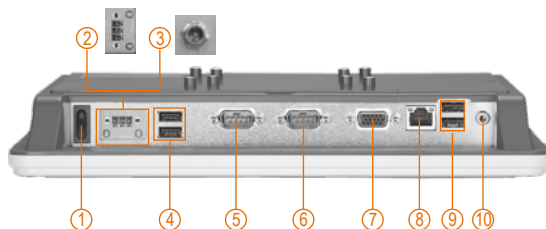

- | | |
|---------------------------------------|----------------------|
| 1. Power switch (ATX) | 6. COM 2 (RS-232) |
| 2. Terminal block for DC power input | 7. VGA |
| or 3. Screw conn. w/ AC power adapter | 8. Ethernet |
| 4. USB 2.0 x 2 | 9. USB 2.0 x 2 |
| 5. COM 1 (RS-232/422/485) | 10. Audio (Line-out) |

Features



Fanless Low Power DualView

- 12.1" XGA/SVGA color TFT LCD display with LED backlight
- Fanless cooling system with Intel® Atom™ processor N270 1.6 GHz
- Ultra slim design: thickness 52mm
- Super light weight: 2.4 kg
- Easy for expansion: Mini card
- Supports panel mount, wall mount, VESA arm, desktop stand (optional)
- RFID (optional)
- Over-current protection fuse



Side view



Desktop stand

Introduction

The GOT-5120T-830 is a 12.1" Intel® Atom™-based fanless touch panel computer. In response to market demand, this panel computer is a cost effective solution. It adopts a modern, super sleek and fanless design and is equipped with a 12.1" TFT LCD as well as Intel® Atom™ processor N270 1.6 GHz. For wireless network connection, the GOT-5120T-830 offers a mini card slot. By just plugging in the mini card WLAN card, customers can have instant access to wireless LAN/GPRS/GSM/3G environments. Besides, it provides two types of power input. One is DC power input (10-30VDC) with terminal block connector. The other is AC power adapter with screw type connector.

Super slim & ultra light design

The GOT-5120T-830 is a super slim touch panel computer for space-limited environment with its thickness of 52mm and weight of 2.4 kg only, which make it installed everywhere.

Built-in internal WLAN antenna

The GOT-5120T-830 provides a mini card slot and a built-in WLAN antenna for wireless network connections. By simply plugging in the wireless LAN card, customers can use the GOT-5120T-830 in a wireless LAN/GPRS/GSM/3G environments.

Excellent thermal solution: aluminum back chassis

With Axiomtek's patent for plastic plus aluminum mechanism design, the GOT-5120T-830 can dissipate the heat easily and keep the system operation stable.

Specifications


Front Bezel	IP65, NEMA 4 rugged protection, plastic front bezel	
LCD Panel	Display Type	12.1" XGA/SVGA TFT LCD with LED backlight
	Brightness (cd/m ²)	500 nits (XGA) 450 nits (SVGA)
	Resolution	1024 x 768 (XGA) 800 x 600 (SVGA)
	Viewing Angel (H/V)	160° / 140°
Main System	CPU	Intel® Atom™ processor N270 1.6 GHz
	Chipset	Intel® 945GSE + ICH7M

System Memory	1 x 200-pin DDR2 SO-DIMM max. up to 2 GB
BIOS	AMI 8 Mbit with RPL/PXE LAN boot ROM
Storage	1 x 2.5" SATA HDD 1 x CompactFlash™
Watchdog Timer	255 levels, 0-255 sec.
Onboard Graphics	Integrated in Intel® 945GSE

I/O Connector	1 x RS-232 (COM 2) 1 x RS-232/422/485 (COM 1) 1 x VGA 1 x Audio (Line-out) 4 x USB 2.0 1 x 10/100/1000Mbps Ethernet
Expansion Interface	1 x PCIe Mini Card slot
Touchscreen	Resistive type
Power Input	1. DC version: 10-30VDC with fuse over-current protection fuse 2. AC version: 100-240V AC-DC 60W power adapter
Dimensions	327.5 mm (12.9") (W) x 52.5 mm (2.07") (D) x 261.8 mm (10.3") (H)
Packing Dimensions	455 mm (17.91") (W) x 105 mm (4.13") (D) x 340 mm (13.39") (H)
Weight (net/gross)	2.48 kg (5.46 lb)/3.84 kg (8.46 lb)
Environment	Operating temperature: 0°C - +50°C (32°F - 122°F) (with W.T. DRAM/HDD in airflow condition) 0°C - +45°C (32°F - 113°F) (with W.T. DRAM/HDD) Relative humidity: 10% - 95% @ 40°; non-condensing Operation vibration: 2G, 5 - 500Hz, random for CompactFlash™
Certification	CE-EMC class A (GOT-5120T-830) CE-EMC class B, UL60950-1 (GOT-5120T-830-J)

* Specification and certifications are based on options and may vary.
** W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Dimensions

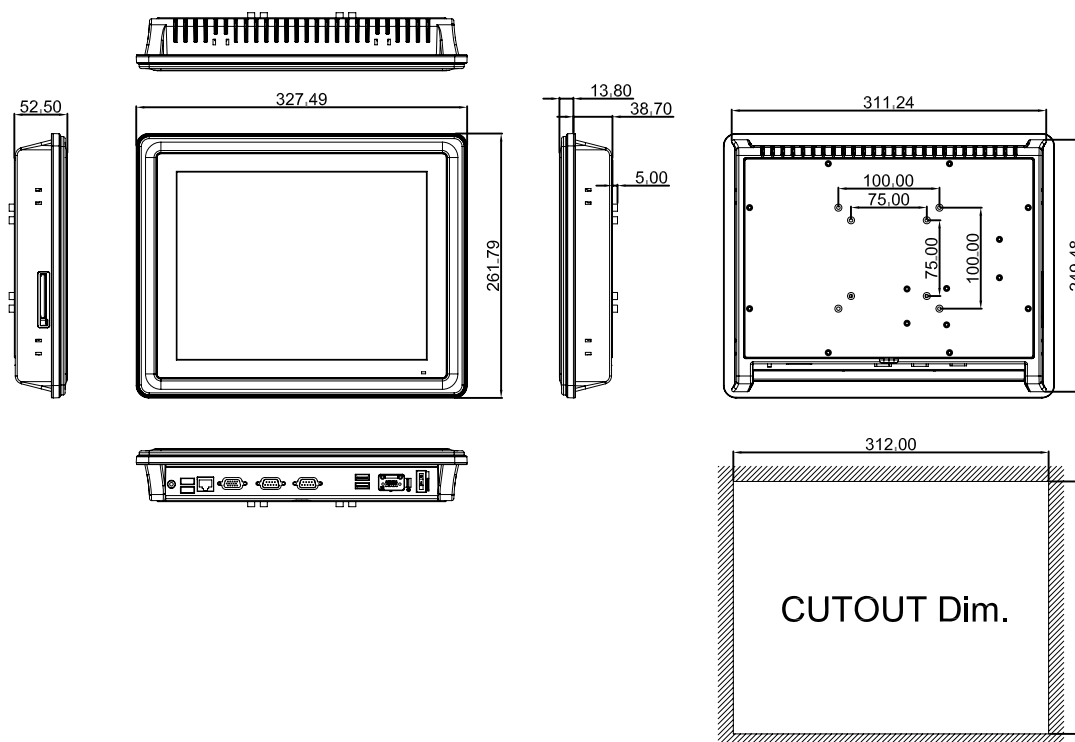

Ordering Information

GOT-5120T-830	12.1" Intel® Atom™ N270 fanless SVGA touch panel computer with terminal block connector
GOT-5120T-830-J	12.1" Intel® Atom™ N270 fanless SVGA touch panel computer with screw type connector & AC-DC 60W power adapter
GOT-5120T-830 -XGA	12.1" Intel® Atom™ N270 fanless XGA touch panel computer with terminal block connector
GOT-5120T-830 -J-XGA	12.1" Intel® Atom™ N270 fanless XGA touch panel computer with screw type connector & AC-DC 60W power adapter
E225840102	Desktop stand
Wireless kit	802.11 b/g wireless LAN kit

* Specification and certifications are based on options and may vary.

Optional EOS Installation

Windows® XP Embedded
Windows® CE.NET

Optional OS Installation

Windows® XP



AC power adapter (for GOT-5120T-830-J)

Overview

Industrial Panel Computers & Monitors

Heavy-duty Fanless Touch Panel Computers

Digital Signage Solutions

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories