
GOT-815 15" XGA TFT IP66-rated Fanless Touch Panel Computer (-20°C ~ +60°C)

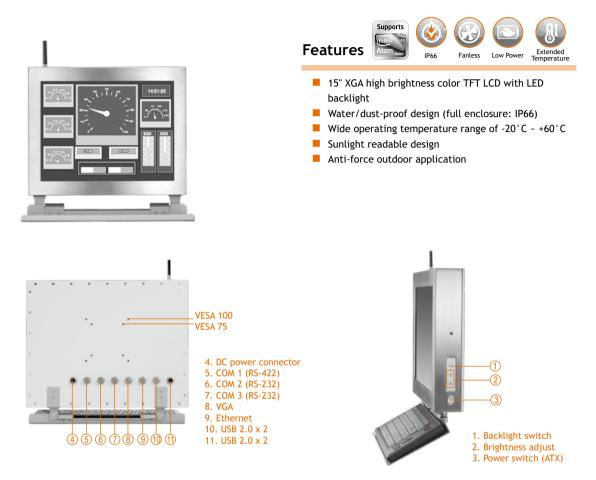

Introduction

The GOT-815 is specially designed for heavy-duty & outdoor application. The IP66-rating stainless steel housing protects entire system from outside damage by water, powder and dust. It also outfits sunlight readable technology and wide operating temperature range of. -20° C ~ $+60^{\circ}$ C. Thus, the GOT-815 is best suited for outdoor environments in extreme sunny or rainy day, dusy or wet spaces in food factories or kitchens, and more harsh applications, such as steel factories, transformer stations and vessels.

IP66-sealed system

The GOT-815 adopts a water/dust-proof housing design and eight IP66-rated connectors. It passes whole system IP66 test by SGS and verified salt mist test and marine grade by IEC60945.

Sunlight readable design

Under strong sunlight in outdoors, the screen is still legible with 800 nits high brightness LCD with LED backlight and capacitive touchscreen. (GOT-815C)

Wide temp. (-20°C ~ +60°C) & anti-vibration (2G) design The GOT-815 supports wide temp. -20°C ~ +60°C. Besides, the patent of anti-vibration for SSD ensures system reliability and stability.

Specifications

Front Bezel	Stanless type 316		BIOS	AMI/Phoenix-Award with	
LCD Panel	Display Type	15" XGA TFT LCD		Axiomtek standard	
	Brightness (cd/m ²)	800 nits		features; such as, SmartView, Ethernet Boot ROM (RPL & PXE),	
	Resolution	1024 x 768			
	Viewing Angle (H/V)	160°/140°		customer CMOS backup	
Main System	CPU	Intel [®] Atom [™] processor N270 1.6 GHz	Storage	1 x 2.5" SSD	
	Chipset	Intel [®] 945GSE + ICH7M		1 x CompactFlash™	
	System Memory	1 x 200-pin DDR2 SO-DIMM max.	Watchdog Timer	255 levels, 1~255 sec.	
		up to 2 GB	Onboard	Integrated in Intel® 945GSE	
			Graphics		

I/O Connector	2 x RS-232		
	1 x RS-422/485 (default RS-422)		
	4 x USB 2.0		
	1 x 10/100/1000Mbps Ethernet		
	1 x VGA		
	1 x PS/2 (optional)		
Expansion Interface	1 x PCIe Mini Card slot		
Touchscreen	5-wire resistive type (GOT-815R)		
	Capacitive type (GOT-815C)		
Power Supply	Power input 24V _{DC}		
Dimensions	387 mm (15.23") (W) x 63 mm (2.48") (D)		
	x 306 mm (12.04") (H)		
Packing Dimensions	510 mm (20.08") (W) x 190 mm (7.48") (D)		
	x 540 mm (21.26") (H)		
Weight (net/gross)	6.5 kg (14.44 lb) / 9 kg (19.84 lb)		
Environment	Operating temperature: -20°C ~ +60°C		
	Relative humidity: 10% ~ 95% @ 40°C, non-condensing		
	Operation vibration:		
	2G, 5 ~ 500Hz, random for 2.5" SSD		
	3G, 5 ~ 500Hz, random for CompactFlash™		
Certification	CE/IEC60945/DNV 2.4 (compliant)		

* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Ordering Information

Normal type GOT-815R 15" IP66-rated touch panel computer with (P/N: E22B815100) Intel[®] Atom™ N270 and resistive touchscreen GOT-815R-WiFi 15" IP66-rated touch panel computer with (P/N: E22B815101) Intel[®] Atom[™] N270, resistive touchscreen and WiFi Anti-force type GOT-815C 15" IP66-rated touch panel computer with (P/N: E22B815102) Intel[®] Atom[™] N270 and capacitive touchscreen GOT-815C-WiFi 15" IP66-rated touch panel computer with (P/N: E22B815103) Intel[®] Atom™ N270, capacitive touchscreen and WiFi

* Specification and certifications are based on options and may vary.

Optional Accessories

822B8150010E	GOT-815 keyboard bracket (w/o keyboard)
822B8150020E	GOT-815 suspension kit
594B8122100E	Water-proof COM port cable (1.8m)
594B8122820E	Water-proof USB cable (1.8m)
594B8122720E	Water-proof LAN cable (1.8m)
594B8152010E	Water-proof VGA cable (1.8m)
50964A23000E	72W/24V power adaptor with M12 connector
	(1.8m)


Optional EOS Installation


Windows [®] XP Embedded	
Windows [®] CE. NET	
Linux	

Optional OS Installation

Windows [®] XP			
Windows [®] 7			

Dimensions





Overview

Industrial Panel Computers & Monitors

Heavy-duty Fanless Touch Panel Computers

Digital Signage

Healthcare & Medical Solution:

Open Frame Panel Computer

Accessories