


Specifications

SoC	DM&P(SiS) Vortex86™ System-on-Chip CPU-200MHz Real Time Clock with Lithium Battery Backup
Bus	PC/104 standard compliant 32-bit x-PCI interface, compatible with PCI Rev.2.2,
BIOS	AMI BIOS
System Memory	Onboard 128MB SDRAM
Watchdog Timer	Software programmable from 4ms to 1hour
VGA	AGP Rev.2.0 compliant Shared system memory up to 64MB (Default 8 MB) Support resolution up to 1,280x1,024 true colors VGA and STN/DSTN/TFT Flat Panel interface support
LAN	Realtek 8100B 10/100Mbps Ethernet Controller Half/Full duplex capability
Flash Disk Support	MSTI EmbedDisk Module (16MB and above) PQI DiskOnModule (16MB and above)
I/O Interface	Enhanced IDE port x1 Parallel port x1 USB port x3 (Ver 1.1) 10/100Mbps Ethernet port x2
Connectors	2.0mm 64-pin socket for 32-bit x-PCI interface 2.0mm 44-pin box header for IDE x1 2.0mm 26-pin box header for Printer x1 2.54mm 5-pin box header for USB x1 2.54mm 2-pin header for Reset x1 External 15-pin D-Sub female connector for VGA x1 External USB connector x2 External 6-pin Mini DIN connector for Keyboard x1 External 6-pin Mini DIN connector for Mouse x1
Power Requirement	Single Voltage +5V @1.28A
Weight	150g
Board Size	133 X 111mm (5.24 x 4.37inches)
Operating Temperature	-20°C ~ +70°C

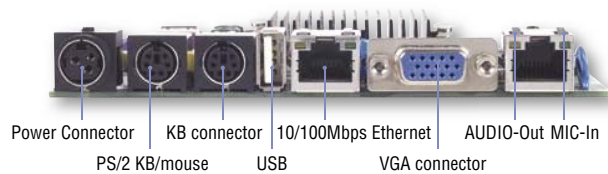

Optional Accessory

EB-303: Chassis for Vortex86-6076-L2



15W Power Adapter



Packing List

- Vortex86-6076L2 x1
- CD for User's Manual & Driver x1
- Cable
 - HDD 44P (2.Q) x1
 - PRINT (2.Q) x1

Order Information

- Vortex86-6076L2** Vortex86 ATX CPU Module
- EB-303** Chassis of Vortex86-6076-L2
- Power-15W-3pin-EU/US/EN** Mini Din 3pin 15W Adapter