

BIS-6620 II Ultra Low Voltage fanless Embedded Mini-PC



Features :

- Compact structure, easy to use, high performance and low power consumption
- Customized I/O port, provide flexibility options
- Offer SATA, SD and CF storage mode
- Variety of display type, for free combination
- +12V power supply, fanless design

Specifications

System		
Model		BIS-6620 II
Motherboard Support		BPC-7652+AFC-340
Chipset		Intel poulsbo SCH
Processor		Atom Z5xx processor
RAM		1x SODIMM, max. support DDR2 400/533MHz 1GB
Display	Display Interface	DVI
	Chip	Intel Poulsbo integrated GMA500
	Graphic memory	Dynamic share 256 MB system memory as Video memory
Storage	SSD	1x CompactFlash(on rear), 1xSD reader
	HDD	Inbuilt 1x1.8"HDD bay, Ultra DMA 100/66/33 and SATA II supported
System I/O	PS/2 Port	1x keyboard and mouse port
	Serial Port	4x COM(4 in 1)
	USB Port	2x USB2.0
	Audio	1x Mic-in, 1x line-in
	Antenna	1x Wi-Fi
Parallel Port		N/A
Ethernet		Realtek RTL8111C, 1000Mbps, 1x RJ45
System Control		Power On/Off
LED Indicator		Power and HDD indicator
Power Supply		DC +12V
System Cooling		Fanless
OS Support		Windows Vista/2000/xp/Linux
Mechanical & Environmental		
Operating Temperature		14°F ~ 122°F (-10°C ~ 50°C)
Storage Temperature		-32°F ~ 140°F (-40°C ~ 60°C)
Relative Humidity		5%~95%, 40°C, no condensing
Vibration		0.5g rms/5~500Hz/random operation
EMC		CE/FCC Class B
Dimensions		120 mm×120 mm×40 mm (W×D×H)
Carton Size		
Net Weight		500g
Gross Weight		
Construction		Heavy duty steel
Surface Treat		Sand blasting and oxidation
Mounting		Meet VESA MOUNT standard, support wall and desktop mounting
Color		Black /Silver

Packing List

- 2300300619 PSU Screw
- 0811500019 Power cord
- 1311205009 12V@5A Power adapter
- User's Manual
- Motherboard Driver CD
- BIS-6620 II

Ordering Information


- BIS-6620 II

Optional Accessories

- WIFI


BIS-6620II Ultra Low Voltage fanless Embedded Mini-PC

BIS-6620II Front Panel :

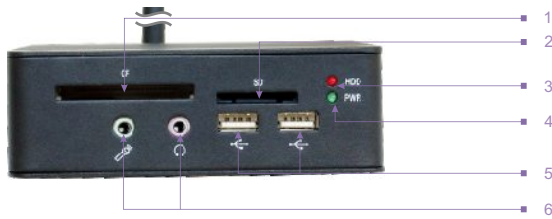

- 1、CF Socket
- 2、SD Socket
- 3、HDD LED
- 4、Power LED
- 5、2×USB2.0
- 6、Audio
- 7、Power Switch
- 8、Power Jack


BIS-6620II Rear Panel :

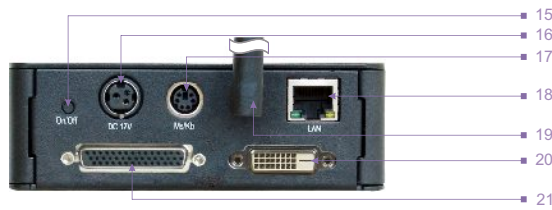

- 9、PS/2 K/M
- 10、Ethernet
- 11、Antenna
- 12、DVI-D
- 13、4x COM(DB44)
- 15、DC 12V
- 16、DVI-I
- 17、PS/2 K
- 18、LAN
- 19、PS/2 M
- 20、DVI-D
- 21、COM

Dimensions

Front View:



Rear View:



Top view:

