

PPC-3115HX Intel 852GM based 15" LCD panel PC with Touch Screen



Features :

- Fanless Design
- Onboard Intel®ULV Celeron®M CPU
- 15" VGA Color TFT LCD Display
- Slim, Fanless, Rugged Design
- Touch Screen Support
- Windows XP Embedded Support
- 10/100Base-TX Ethernet
- Dual independent Displays


Specifications

System	
Processor	Intel®ULV Celeron®M CPU
System Memory	1x DDR SO-DIMM slot, support DDR 200/266MHz, max. up to 1GB
LCD/CRT Controller	Intel®ULV Celeron-M integrated
Ethernet	10/100Base-TX Ethernet interface, 2x RJ45
I/O Port	1x RS-232, 1x RS-232/422/485 2x USB 2.0 ports 1x mouse and keyboard port LINE-out, MIC-in
Storage	Type II Compact Flash and 2.5" HDD
OS Support	Windows XP, Windows XP Embedded
System FAN	Fanless
Mechanical	
Construction	Duralumin panel and steel chassis
Color	Front Bezel: Argentate Back Cover: Black
Installation	Mounting, hanging
Dimension (W×H×D)	15.75"×12.6"×2.44", 400mm×320mm×62mm
Carton Size (W×H×D)	18.9"×15.75"×6.5", 480mm×400mm×165mm
Gross Weight	14.33lb±1lb (6.5kg±0.5kg)
Environment	
Operating Temperature	32°F~104°F(0°C~40°C)
Storage Temperature	-4°F~140°F(-20°C~60)
Storage Humidity	10-90%, 40°C, non condensing
Vibration	Random operation 1G,5-500Hz
Shock	15G peak acceleration(11m sec. duration)/operation
EMC	CE/FCC Class A
Power Supply	
AC-DC Input	1U 180W ATX Power, Support AC 90V-240V input

LCD	
Display Type	15" color TFT LCD
Max. Resolution	1024×768
Active Area	304.128mm(H)×228.096mm(V)
Max. Color	262K
Dot Size	0.297mm×0.297mm
Luminance	250cd/m ²
Contrast Ratio	700: 1Typ
Touch Screen	
Module	Four-Wire Analog Resistive
Input Method	Stylus Pen or Finger
Hardness of surface	Pencil hardness 3H
Input life	1,000,000 times min (R0.8mm with 250g force)
Notes life	100,000 words min (R8,hardness 60°,250g force)
Operation force	R0.8(≅8~50g)
Transparency	≧76% (measured by BYK-Gardner)
Controller Interface	RS232, USB


PPC-3115HX Intel 852GM based 15" LCD panel PC with Touch Screen

Port View



- | | |
|------------------|-------------------|
| 1、Audio Port | 5、KB/MS PS/2 Port |
| 2、Power Socket | 6、2x LAN Port |
| 3、2x USB2.0 Port | 7、VGA Port |
| 4、2x COM Port | |

Dimensions

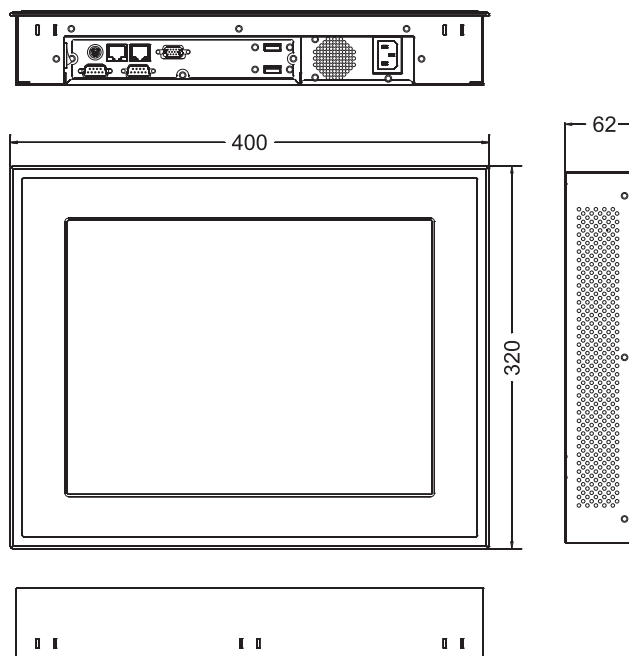

Packing List

- | | | |
|------------------------------------|--|----------------------------|
| ● 0931840029
Wallmount Bracket | ● 4000605219
HDD Screw | ● 0811500019
Power Cord |
| ● 3018439719
Nylon Non-slip mat | ● 6500403509
Fan Screw | ● 0000000039
Stylus Pen |
| ● 1000300609
PSU Screw | ● 0200000129
15" Touch screen Driver CD | ● User's Manual |
| ● 1630350609
Power Screw | ● 0560400029
IDE Data Cable | ● Motherboard Driver CD |
| | | ● PPC-3115HX |

Ordering Information

- **PPC-3115HX**
Panel PC, 15" TFT touch screen, ATX, On board CPU, Intel Pentium-M/Celeron-M, VGA, DDR333/400MHz(up to 1GB), 1x CF, 1x PS/2, 1x LPT, 2x USB, 2x COM, 2x 100Mbps Ethernet

Optional Accessories

- **Touch screen**
15" TFT touch screen