

WADE-8180

Leading Intel® Core™ 2 Quad / Core™ 2 Duo Processor based Mini-ITX embedded board with Dual Display, Dual Gigabit Ethernet, SATA, COM and USB



FEATURES

- Intel® Core™ 2 Quad / Core™ 2 Duo processor
- Intel® Q45 Express and ICH10DO chipset
- Two 240-pin DIMM sockets support dual channel DDR3 SDRAM up to 4GB
- Dual display: VGA / DVI-D, 3rd display via PCI-Express x16 slot
- Four SATA ports
- Two GbE LAN ports and One PCI-E x16 slot
- RAID 0 / 1 / 5 / 10
- TPM 1.2 and iAMT 5.0 supported

Built with Intel® latest Q45 chipset, WADE-8180 takes advantage of Intel® Core 2 Quad & Core 2 Duo technologies. With its PCI-E x16 slot, WADE-8180 offers the availability of extra graphic card which can offer powerful graphic processing ability. In addition, the VGA and DVI-D dual video outputs can drive two displays

simultaneously that suitable for gaming application. With dual GbE LAN, four SATA, dual COM and eight USB I/O function, WADE-8180 can be the best solution for multiple applications such as automation, multi-media and KIOSK.

SYSTEM

CPU	Intel® Core™ 2 Quad / Core™ 2 Duo processor
FSB	1333/1066/800 MHz
BIOS	AMI BIOS
Chipset	Intel® Q45 Express and ICH10DO chipset
System Memory	Two 240-pin DIMM sockets support dual channel 800/1066MHz DDR3 SDRAM up to 4GB
Storage	4 x SATA-300
Watchdog Timer	Reset; 1 sec.~255 min. and 1 sec. or 1 min./step
H/W Monitor	Monitoring CPU and system temperature, voltage and cooling fan status
GPIO	Onboard programmable 8-bit Digital I/O interface (4 input / 4 output)
Expansion	One PCI-Express x16 Slot

I/O

MIO	1 x D-SUB 15-pin & 1 x D-SUB 24-pin connector, 2 x RS232 ports, 1 x K/B & Mouse
IrDA	N/A
USB	4 x USB 2.0 ports and 4 x USB 2.0 ports with header
Audio Interface	Line out, Line-in and Mic-in
Ethernet Interface	IEEE 802.3 10/100/1000BASE-T Gigabit Ethernet compliant


DISPLAY

Chipset	Intel® Q45 Integrated Intel® Gen 5.0 GMA 4500 Graphics
Display Memory	Intel® Dynamic Video Memory Technology (Intel® DVM 5.0)
Resolution	Up to 2048 x1536 @ 75 Hz (QXGA)
DVI	DVI-D interface

MECHANICAL & ENVIRONMENTAL

Power Requirement	TBD
Operating Temperature	0~60°C
Operating Humidity	10%~90% non-condensing
Dimension	6.69" x 6.69" (170mm x 170mm)

REAR I/O

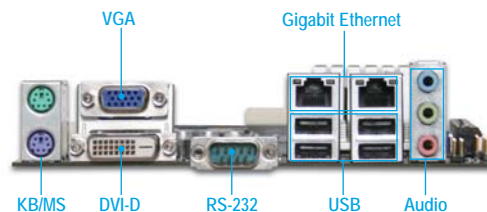

ORDERING GUIDE

■ WADE-8180

Intel® Core™ 2 Quad / Core™ 2 Duo processor Mini-ITX Motherboard

- * Specifications are subject to change without notice.
- * Core™ 2 Quad and Core™ 2 Duo processor are registered trademarks of Intel® Corporation.
- * Other trademarks, logo, brands and company names are the property of their respective owners.



Portwell, Inc. (Headquarters)
 4F, No. 186, Jian-Yi Rd., Chung-Ho City,
 235 Taipei, Taiwan
 Tel: +886-2-7731888
 Fax: +886-2-82271109
 E-mail: info@portwell.com.tw
 http://www.portwell.com.tw

American Portwell
 Fremont Tel: +1-510-403-3399
 Norcross Tel: +1-510-403-3399
 E-mail: info@portwell.com
 http://www.portwell.com

Portwell Japan, Inc.
 Tokyo Tel: +81-3-5298-8071
 E-mail: info@portwell.co.jp
 http://www.portwell.co.jp

Beijing Portwell
 Beijing Tel: +86-10-82701616
 Shanghai Tel: +86-21-3222-0505
 Shenzhen Tel: +86-755-8621-7695
 E-mail: info@portwell.com.cn
 http://www.portwell.com.cn

Portwell-Laxsons India
 Tel: +91-22-2685-9911
 E-mail: info@portwellaxsons.com
 http://www.portwellaxsons.com

Portwell, B.V.
 Tel: +31-252-620790
 E-mail: info@portwell.nl
 http://www.portwell.nl

Portwell (UK) Ltd.
 Tel: +44(0)1235-750760
 E-mail: info@portwell.co.uk
 http://www.portwell.co.uk