



Feature:

- ◆ Duralumin panel and steel chassis
- ◆ 15" TFT LCD display with Touch-screen
- ◆ Utilize 5.25" industry mainboard
- ◆ One VGA, LCD and VGA support independently dual-display
- ◆ Two COMs, two LAN, two USB ports


Description:

PPC-3115 is 15" TFT LCD panel PC with touch screen, use high strength duralumin front panel and stainless steel chassis, can be used in poor industrial field. It is designed with embedded ULV mainboard, fanless. Provide one VGA, one dual-channel LVDS and one TV-out, support VGA+LVDS, TV+LVDS (optional) independently dual-display, two 100M LAN, one AC'97 Audio. It is widely used in the field of industrial control, building monitor, multimedia conference system, medical instrument, bank and ticket office, etc.

Specification:

Main	Chassis Material	Duralumin Panel and steel chassis
	Display	Colorful TFT LCD 15" with Touch-screen
	Hard Disk Driver	One IDE
	Serial port	Two Serial ports
	Parallel port	--
	Lan port	Two RJ-45, 10/100Mbps LAN
	VGA	One VGA
	USB	Two USB2.0 ports
	KB/MS	PS/2
	Expansion slot	One CF card socket
	Cooling System	Fanless design
	Certification	3C, CE, FCC
Mainboard	Model Number	NORCO-5730ALE
	CPU	Support Intel ULV Celeron-M CPU
	Dimension	203mm×145mm
Other	Power Supply	1U 180W industry power supply
	Operate System	Windows98/2000/XP, Unix 5.0.5, RedHat 9.0, FreeBSD etc.
	Dimension	400mm×62mm×320mm (W×D×H)
	Working Temperature	0℃～50℃
	Storage Temperature	-40℃～60℃
	Humidity	5%～9%, 40℃ (no condensing)

Dimension:

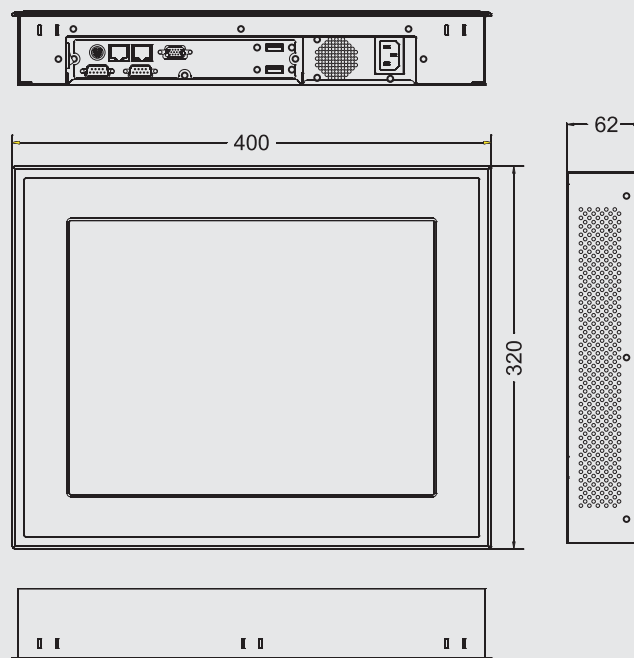

Order Information:

Model No.	8.4"LCD	Touch Screen	Hard Disk Drive	RAM
PPC-3115	√	√	40G	DDR 512MB

Accessories:

PSU cable	Product Manual	HDD screw	Screw	Screw
One	One	6 (1/8×6 screw)	4 (M4×8)	6 (M3×6)