

BIS-6592GM Intel GM45 Based Fanless Embedded BoxPC



Features :

- "ICE FIN" enclosure and cooling system
- Intel GM45+ICH9ME Chipset based
- DVI,VGA,HDMI Video Output, HD support
- Rich I/O: 2x COM, 8x USB, Audio
- 2x 1000Mbps Ethernet
- Support Intel AMT4.0 Remote control
- DC 12V Powered

Specifications

System		
Motherboard Support		MITX-6890
Display	Display Interface	1x VGA(DB15), 1x DVI,1xHDMI
	Chip	Intel GM45 integrated GMA 4500 HD
	Graphic memory	Dynamic share 512MB system memory
Storage	SSD	In-built 1x CF socket support Type I/II CompactFlash
	HDD	1x 2.5" HDD Bay(In-built)
System I/O	PS/2 Port	1x keyboard port, 1x mouse port
	Serial Port	1x RS-232, 1xRS232/422/485
	USB Port	8x USB2.0
	Audio	Line-out, Mic-in
	Parallel Port	N/A
Chipset		Intel 945GSE+ ICH7M
System memory		2x 200-Pin SODIMM DDRIII 800/1066MHz, max support 8GB
Ethernet		1000Mbps, 2x RJ45
Expansion device Slot		1xMini PCIE
System Control		Power Switch button
LED Indicator		N/A
Power Supply		+12V/5A Power Adapter
System Cooling		"ICE FIN" cooling system
OS Support		Windows XP/XP-E, WINCE5.0/6.0, LINUX etc.
Mechanical &Environmental		
Operating Temperature		32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature		-40°F ~ 176°F (-40°C ~ 80°C)
Relative Humidity		5%~95%, 40°C, no condensing
Vibration		0.5g rms/5~500Hz/random operation
EMC		CE/FCC Class B
Dimensions		229mmx194mmx110mm(WxDxH)
Carton Size		360mmx345mmx230mm(W x D x H)
Net Weight		3.3±0.1 Kg
Gross Weight		5.0±0.1Kg
Construction		Heavy duty steel
Surface Treat		Sand blasting and oxidation
Mounting		Desktop(Wall mounted bracket is available for this model)
Color		Black

Packing List


- **2300300619**
PSU Screw
- **0811500019**
Power cord
- **1311205009**
12V@5A Power adapter
- **Wall-Mount**
- **Motherboard Driver CD**
- **Warranty Card**
- **User's Manual**
- **BIS-6592GM**

Ordering Information

- **BIS-6592GM**
Embedded BoxPC, AT, support Intel Penryn/Core 2 Duo /Celeron M processor, VGA, DVI and HDMI video output, 2x 200-Pin SODIMM DDRIII 800/1066MHz, max. upto 8GB, 2x SATA II, 1xMiniPCIE, 1xCF, 8x USB, 1xRS-232, 1xRS-232/ RS-422/RS-485, 2x PS/2, 2 x 1000Mbps Ethernet, Audio

Optional Accessories

Front View

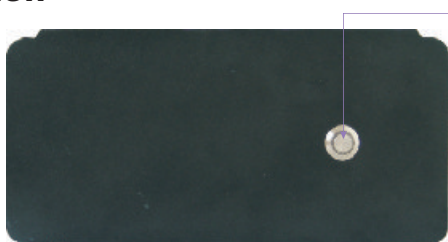

Rear View



- 1、Power Button
- 2、DC 12V Input
- 3、2x COM Ports
- 4、DVI Port
- 5、4x USB2.0
- 6、2x Gigabit Ethernet
- 7、LINE-OUT
- 8、MIC
- 9、4x USB 2.0
- 10、VGA Port
- 11、HDMI Port
- 12、PS/2 Keyboard
- 13、PS/2 Mouse

Dimensions

